



Service Manifold Sets

Mastercool introduces the most advanced and user friendly Digital Manifold on the market today. This manifold offers a large, easy to read LCD that displays Pressures, Saturated Temperatures, Actual Temperatures, Superheat and Subcooling Temperatures for over 60 refrigerants. When used with the clamp-on thermocouple connector, it will display the actual temperature and automatically calculate the superheat or subcool temperature. When the vacuum sensor cable is attached to the manifold it will display deep vacuum. To insure lasting performance and durability the manifold case is constructed of ABS material and protected by a rugged rubber boot. The technician now has a fully functional manifold with the intelligence to quickly access and deliver the accurate information needed to do the job right.



Realcold Stock No.	Model	Description	Gauges / Hoses	Scale	Price \$ Excl. GST
Aluminium 4-Way Manifold Gauge Sets					
T4110M	96203-MB	4W Ball Valve Manifold (80 mm)	R22, R134a, R404A, R407A, R507A	bar & psi, °C	
T4111M	96203-EB	4W Ball Valve Manifold (80 mm)	R22, R407C, R410A	bar & psi, °C	

Full 3/8" bore through the block increases; flow considerably, faster charging & recovery. Ball valve rotates 90° between two teflon washers requiring little effort to turn, even under pressure. Opens and closes quickly with only a quarter turn. Knob position shows whether valves are open or closed.

2-Way Aluminium Manifold Piston Valve					
T2182M	93103-E	2W Aluminium Manifold	R22, R404A, R410A	bar & psi, °C	

Mastercool's 2-Way Manifolds feature free floating piston valve design resulting in less wear and tear in comparison to market standard twisting piston valves. Double O-Ring allows for a much better seal resulting in less leaks.

2-Way Digital Manifold					
T2191M	99661	Digital 2W manifold + thermocouple, 3-150 cm	R22, R134a, R404A, R410A	bar & psi, °C, °F, Mpa, Kg/cm ²	

Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm hoses, vacuum sensor with cable and clamp-on thermocouple.



4-Way Digital Manifold					
T4220M	99972	Digital 4W Manifold + thermocouples, 3-180 cm	R22, R134a, R404A, R410A	bar & psi, °C, °F, Mpa, Kg/cm ²	
T2192M	99961-EU	Digital 4 Way Manifold, complete set, 3-150 cm	R22, R134a, R404A, R410A	bar & psi, °C, °F, Mpa, Kg/cm ²	

Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm (3-180 cm) ball valve hoses with manual shut-off valves and one black vacuum hose, vacuum sensor with cable, clamp-on thermocouple, data logger CD and USB cable.



Tools & Test Equipment



Charging hoses suitable for all CFCs, HCFCs, HFCs & R410A

Mastercool uses only GRADE 5 HOSE with a selection of Standard and Nylon Barrier for high pressure applications. Knurled brass nuts make finger tightening easy. Crimped with 8 segment dies for secure fit and maximum durability. Hoses are available in sets and a variety of lengths to meet all EPA, SAE and UL requirements for containment of refrigerant.

Realcold Stock No.	Model	Fittings	Length	Colour	Price \$ Excl. GST
80 mm Standard Hoses					
T2240M	47363	1/4" Charging Hoses	90 cm	Red	
T2242M	47361			Blue	
T2244M	47362			Yellow	
T2246M	47603	1/4" Charging Hoses	150 cm	Red	
T2248M	47601			Blue	
T2250M	47722			Yellow	
T2252M	47723	1/4" Charging Hoses	180 cm	Red	
T2254M	47721			Blue	
T2280M	46372	1/4" Hoses Set - W/Automatic Shut Off	180 cm	Set of 3	
T2310M	49363-JT	1/4" x 5/16" Charging Hoses	90 cm	Red	
T2311M	49361-JT			Blue	
T2275M	49603-J-T	5/16" Charging Hose	150 cm	Red	

Vacuum Hoses

Realcold Stock No.	Model	Fittings	Length	Colour	Price \$ Excl. GST
T2262M	94136	3/8" Vacuum Hose	90 cm	Black	
T2259M	94160		150 cm	Black	
T2266M	94172		180 cm	Black	

Hose Gasket

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T0072	MR517	Gasket to suit 1/4" hoses (not suitable for 410a)	
T2601M	OGB79583	Core depressor	
T2602	19011	Gasket to suit 3/8" hose	
T2603	19034	Gasket for 14 mm Coupler Adapter (refer J0744 on page 159)	
T0756	CH-79583	Hose gasket set with 3 gaskets and a core depressor	

Manual Shut-Off Ball Valves

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T4303M	90430	1/4" x 1/4" Swivel Ball Valve only	
T4304M	90433	1/4" x 5/16" Swivel Ball Valve only	



Gauges

Realcold Stock No.	Model	Description	Suitable for Refrigerants	Scale	Price \$ Excl. GST
80 mm Standard Gauge					
T2217M	EBH	High Pressure Gauge (80 mm)	R22, R407C, R410A	bar & psi, °C	
T2218M	MRBH	High Pressure Gauge (80 mm)	R22, R134a, R404A	bar & psi, °C	
T2219M	MRBL	Low Pressure Gauge (80 mm)	R22, R134a, R404A	bar & psi, °C	
T2229M	EBL	Low Pressure Gauge (80 mm)	R22, R407C, R410A	bar & psi, °C	



63 mm Standard Gauge					
T2220M	EH	High Pressure Gauge (63 mm)	R22, R410A, R507, R404A	bar & psi, °C	
T2222M	MRH	High Pressure Gauge (63 mm)	R22, R134a, R404A	bar & psi, °C	
T2210M	MRL	Low Pressure Gauge (63 mm)	R22, R134a, R404A	bar & psi, °C	



Accessories					
T2233M	91553-E	Gauge Protection Set (80 mm)			
T2234M	93553-E	Gauge Protection Set (63 mm)			
T2235M	85253-E	Replacement Lens for GGE (63 mm)			
T2236M	98251-E	Replacement Lens for GGE (80 mm)			





Couplers

Realcold Stock No.	Model	Description	Price \$ Excl. GST
Airconditioning (R410A) Couplers			
T2711M	90413	R410A Adapter - 5/16" FF x 1/4" MF	
T2712M	90366	R410A Adapter - 1/4" FF x 5/16" MF	



Automotive (R134a) Couplers			
T2307M	82834-E	Service coupler HS R134a manual 1/4" FL-M x 16 mm	
T2308M	82934-E	Service coupler LS R134a manual 1/4" FL-M x 13 mm	



Access Port Core Remover			
T2290M	91496	Valve core access tool w/access port	
T4050M	91490	Standard Valve Core Remover/Installer 1/4"	
T4060M	91498	Valve core remover/installer, incl. for R410A	



Imperial Kwik - Couplers			
T0092	16C	Kwik-Coupler Model 16C Straight Coupler (45° Flare 1/4" Female x 1/4" Male)	
T0093	15140	Kwik-Coupler Model 17C 90° Coupler (45° Flare 1/4" Female x 1/4" Male)	
T0093A	65155 & 65153	Gasket Set for above Kwik-Couplers	
T0095	26C	Kwik-Couplers Straight 5/16"	
T0097	27C	Kwik-Couplers 90° Coupler 5/16"	





Mastercool Tools

Realcold Stock No.	Model	Description	Price \$ Excl. GST
Tube Cutters			
T4025M	70027	Mini tube cutter for 1/8" to 5/8" OD tubing	
T2011M	72029	Mini tube cutter for 3/8" to 1 1/8" OD tubing	
T4021M	72035	Heavy duty tube cutter 1/8 to 1 1/8" OD tubes	
T2008M	70038	Heavy duty tube cutter 1 1/4 to 3" OD tubing	



Cutter Wheels			
T4022M	70028	Cutting wheels for 70027	
T4023M	72030	Cutting wheels for 70029	
T4024M	72034	Cutting wheels for 70035	
T4026M	70138	Cutting wheels for 70038	



Tube Deburring Tool			
T2089M	71685	Pencil type reamer - metal	
T1030	MA-49310	Pencil reamer	



Tube Expander Kit			
T2035M	71600	Hydra-swage tube expander kit - 7 heads 3/8" - 1 1/8"	



Tube Benders Mechanical			
T2070M	70070	Tube benders kit	



Ratchet Wrenches			
T2046M	70082	Refrigeration ratchet wrench 1/4", 3/8", 3/16", 5/16" sq	
T2049M	70081	Ratchet wrench 9/16", 1/2" hex	



Flaring & Swaging Tools			
T0742	CH-806A	Flaring Tool 1/4" to 3/4" OD	
T2024M	70052	Flaring tool 3/16" to 5/8"	
T4000M	70048	Set of 5 swaging punches	
T4010M	70053	Flaring and swaging kit (275) 1/8" to 3/4"	
T2038M	71600-11	Expander head 1 3/8"	
T2039M	71600-13	Expander head 1 5/8"	
T2037M	71600-17	Expander head 2 1/8"	



Tools & Test Equipment



Tube Benders (lever type)

Realcold Stock No.	Model	Brand	Description	Price \$ Excl. GST
T0701	CH-364-04-1/4	Shine Year	for 1/4" OD tube	
T0703	CH-364-06-3/8	Shine Year	for 3/8" OD tube	
T0704	CH-364-08-1/2	Shine Year	for 1/2" OD tube	
T0705	CH-364A-10-5/8	Shine Year	for 5/8" OD tube	
T0706	CH-364-12-3/4	Shine Year	for 3/4" OD Tube	
T0710	CH-367	Shine Year	for 1/4", 5/16", 3/8" OD tube, 11/16 radius to centre, 180° bender	



Bending Springs

Realcold Stock No.	Model	Brand	Description	Price \$ Excl. GST
T0001	CH-102-04	Shine Year	to suit 1/4" OD tube	
T0006	CH-102-05	Shine Year	to suit 5/16" OD tube	
T0002	CH-102-06	Shine Year	to suit 3/8" OD tube	
T0003	CH-102-08	Shine Year	to suit 1/2" OD tube	
T0004	CH-102-10	Shine Year	to suit 5/8" OD tube	
T0005	CH-102-12	Shine Year	to suit 3/4" OD tube	



Miscellaneous Tools

Realcold Stock No.	Model	Brand	Description	Price \$ Excl. GST
T0729	CH-42	Shine Year	PVC Pipe Cutter	
T2092	CH-208	Shine Year	Tube Reamer	



Pinch Off Tool


Realcold Stock No.	Model	Description	Price \$ Excl. GST
T0053	Shine Year CH-201	180 mm Pinch Off Pliers	



T0053

Fin Combs

Realcold Stock No.	Description	Price \$ Excl. GST
T0255	Wagner T-100 Kit Interchangeable Heads (4 thru 14 fpi)	
T0256	Wagner Head (8 fins per inch) Orange	
T0257	Wagner Head (12 fins per inch) Dark Green	
T0258	Wagner Head (5 - 10 fins per inch) White	
T0259	Wagner Head (11 fins per inch) Blue	
T0791	CH-352 Stainless Steel Fin Comb	



T0255

Inspection Mirrors

Realcold Stock No.	Description	Price \$ Excl. GST
T1016	MA-Line 1.1/4" Round Mirror	



T1016

Temperature Probe

Realcold Stock No.	Description	Price \$ Excl. GST
T2171M	Clamp-on Temperature Probe. 1m	

Vacuum Gauge

Realcold Stock No.	Description	Price \$ Excl. GST
T2239	Mechanical Vacuum Gauge	



Mastercool®
"World Class Quality"



Vacuum Pumps

A good quality vacuum pump is an integral tool for complete A/C service. Mastercool vacuum pumps are durable and time tested. They stand up to the most grueling conditions and will provide years of reliable service. Mastercool offers a complete selection of pumps. Regardless of your service requirements, Mastercool has a model for your application.

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T4240M	90060-220-AUS	Vacuum pump 35 Ltr/min, 2 stages	
T2400M	90065-220	Vacuum pump 142 Ltr/min, 2 stages	
T2402M	90067-220	Vacuum Pump 213 Ltr/min, 2 stages	

Specifications	T4240M	T2400M	T2402M
Free Air Displacement	35 Lit/min	119 Lit/min	178 Lit/min
Number of Stages	2 stages		
Ultimate Vacuum	25 Microns	25 Microns	25 Microns
Intake	1/4" SAE & 1/2" ACME		
Motor	1/6 Hp, 2850 RPM	1/3 Hp, 1425 RPM	1/2 Hp, 1425 RPM
Oil Capacity	295 ml	531 ml	708 ml
Dimensions	29.5 x 11.5 x 21.5 x 18 cm	37 x 15.5 x 27.5 x 24 cm	41 x 15.5 x 27.5 x 24 cm
Nett Weight	5.40 Kg	15.0 Kg	15.40 Kg



Mastercool[®]
"World Class Quality"



Recovery System

Mastercool introduces its newest addition to the recovery machine lineup. Taking the reliability of the 69000 series machines, Mastercool has enhanced those features to allow for maximum recovery capacity while at the same time decreasing size and weight. The design of the new double piston compressor and cooling by the largest fan and condenser in the market makes the new 69300 series the most complete solution to your recovery needs.

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T2380M	69300-220	TWIN TURBO Refrigerant Recovery Unit 220V-50/60 Hz	

Specifications	Recovery Rate	Operating Temperature	Weight	Dimensions in mm
1/2 Hp oil less compressor	Direct vapour up to 0.39 Kg/min (17 Kg/h)	0 to 50 °C	11 Kg	457 (L) x 254 (W) x 356 (H)
	Direct liquid up to 3.1 Kg/min (206 Kg/h)			
	Push pull up to 8.1 Kg/min (498 Kg/h)			

Recovery Cylinders

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T2490M	62010	12,5 L recovery cylinder tank	
T2491M	63010	27,2 L recovery cylinder tank	



T2490M T2491M

Testing Equipment

Realcold Stock No.	Model	Description	Price \$ Excl. GST
Temperature Test Equipment			
T1314	MA-DMT123	Dual Probe Thermometer Extra wide Temperature range from (-200°C to 1370°C) with high accuracy	
T1328	MA-RT900	Hand Held Digital Thermometer Wide Measurement range (-50°C to 200°C), never needs to be calibrated	
T1332	MA-12843	Digital Anemometer	
T1349	MA-600CF	Auto ranging ECO clamp meter	



Refractometers			
T1032	MA-REF401C	Glycol Refractometer Precision optical instrument designed to measure the freezing point of ethylene or propylene based cooling systems. The two Celsius non-linear scales cover -50°C to 0°C for ethylene glycol and propylene glycol. The resolution of the temperature scale is 0°C	
T1033	MA-REF700	Oil Refractometer Easy to use handheld instrument designed to accurately measure the mineral oil in polyolester (POE) lubricant during change of refrigerants	



Thermometers

Arthermo -40°C/+40°C dial thermometers are housed in a heavy duty nylon case with provision for bottom or back entry capillary. Can be flush or surface mounted. Can be calibrated.

Realcold Stock No.	Model	Description	Price \$ Excl. GST
Dial Thermometers			
U0080	Realcold	60 mm dial (3000 mm capillary)	
U0082	Realcold	80 mm dial (3000 mm capillary)	
U0084	Realcold	100 mm dial (3000 mm capillary)	
U0091	Realcold	100 mm dial (6000 mm capillary)	



Cabinet Thermometers. Thermometers have provision for recalibration			
U0147	Arthermo	Type 540 -40°C /+40°C 64.5 mm dial S/S case, with foot for standing & hook for hanging.	
U0148	Arthermo	Type 519B -40°C /+40°C 64.5 mm dial Acrylic resin case, with hook for hanging.	



Miscellaneous Testing Equipment

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T1350	MA-DMTK	K-Temp probe	
T1347	MA-12355	Pipe clamp temp lead	



Mastercool®
"World Class Quality"

Other Test Equipment

Digital Vacuum Gauge is packaged in blow molded case. It is a hand held unit that uses thermocouple technology. This vacuum gauge has been designed with the technician's field environment in mind, allowing for self-calibration and a sensor that will not be damaged by small mists of oil. This unit allows for a target vacuum range (20,000 to 1 micron) to be programmed with a light sensor indicator. Now you have the freedom to continue with your other work and come back to the system once you see the indicator light signaling your target vacuum.



T2435M

Realcold Stock No.	Model	Description	Price \$ Excl. GST
Electronic Vacuum Gauge			
T2435M	98061	Electronic thermocouple vacuum gauge	

Charging Equipment			
T2370M	98211-A	Accu-Charge II - Charging Scale, programmable	
T2371M	98315	Wireless Charging Scale with Solenoid	
T2100M	98230	Charging Solenoid Module	



T2370M

Leak Detectors			
T2323M	55500-220	Heated UV sensor electronic leak detector w/220V battery charger	
T2326M	55500-SEN	Sensor for 55500	
T4210M	—	Electronic leak detector	



T2323M

Temprecord Data Loggers

Realcold Stock No.	Description	Price \$ Excl. GST
U0320	Multi-Trip Use Data Logger	
U0324	Multi-Trip Use Low Temperature Data Logger	
U0339	Relative Humidity Logger	
U0341	Usb Reader Interface	



U0339



U0341

Tools & Test Equipment



Ritchie - Yellow Jacket Spares

Realcold Stock No.	Model	Description	To Suit	Price \$ Excl. GST
Manifold Parts				
T2609	19015	Gasket	T2206 CH-80	
T2610	41103	3/8" Piston	48584	
T2611	41043	Titan Piston Assembly	49833, 49869	
T2612	41133	1/4" Piston	41382, 42010	
T2614	41134	Feed Screw	41382, 48584	
T2615	41056	Titan/Bantam Feed Screw	49833, 49869, 45936	
T2616	41107	Retaining Nut	48584	
T2617	41094	Brute II Red Handle	46140, 46160	
T2619	41044	Titan Red Handle	49833, 49869	
T2621	41092	Brute II Blue Handle	46140, 46160	
T2623	41042	Titan Blue Handle	49833, 49869	
T2624	41142	Handle Screws (Set of two)	41382, 48584	
T2625	41091	Brute II Yellow Handle	46140, 46160	
T2626	41041	Titan Yellow Handle	49833, 49869	
T2627	41090	Handle Screws Brute II	46140, 46160	
T2628	40279	Hanging Hook	41382, 48584	
T2629	41048	Titan Handle Screw	49833, 49869	
T2631	41096	Retaining Nut Brute II	46140, 46160	
T2633	41049	Retaining Nut Titan	49833, 49869	
T2632	41109	Sight Glass "O"-Ring	48584	
T2634	41135	Retaining Nut	41382	
T2636	41141	Handle Screw & Washer	41382	
T2641	41051	Yellow Handle	45836, 45936	
T2642	41052	Blue Handle	45836, 45936	
T2643	41053	Piston / "O"-Ring	45836, 45936	
T2644	41054	Red Handle	45836, 45936	
T2645	41055	O-Rings	45836, 45936	
T2646	41056	Feed Screw	45836, 45936	
T2647	41057	Retaining Nut	45836, 45936	
T2648	41058	Handle Screw/Washer	45836, 45936	
T2650	41061	Sight Glass Assembly	45836, 45936	
T2651	41131	Manifold O-Rings Series 41	42010	
T2653	41134	Series 41 Valve Feed Screw	42010	
T2657	41143	Series 41 Valve Assembly	42010	
T2658	41047	O-Ring Sight Glass	Brute II and Titan	



Ritchie - Yellow Jacket Vacuum Pump Spares

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T2451	93441	Replacement cartridge for 95 L pump	
T2452	93461	Replacement cartridge for 142 L pump	
T2453	93012	Crystal for Vacuum Gauge Suits Vacuum Pumps	
T2454	93011	Vacuum Gauge	
T2457	93403	Oil Sight Glass (fits pumps manufactured up until 1997)	
T2467	93365	Oil Sight Glass (fits 95 and 142 l/m pumps (manufactured from 1998 on)	
T2458	93404	Oil Case Gasket (fits 95 and 142 l/m pumps (manufactured from 1998 on)	
T2459	93386	Exhaust Filter	
T2460	93387	Filter Element	
T2462	93047	Drive Coupling	
T2464	93031	Shaft Seal	
T2465	93045	Motor Capacitor	
T2468	93048	Oil Cover Gasket 85-96 Suits Vacuum Pumps	
T2469	93369	Oil Cover Gasket 98-05 Suits Vacuum Pumps	
T2470	93146	Electric Motor 115/230V 50/60 Hz	
T2471	93507	Oil Cover Gasket 05 Suits Vacuum Pumps	
T2472	93368	Gas Ballast 93368 Suits Vacuum Pumps	
T2473	93509	Gas Ballast 93509 Suits Vacuum Pumps	
T2474	93032	O-Ring Gas Ballast 93032 Suits Vacuum Pumps	
T2475	93398	O-Ring Gas Ballast 93398 Suits Vacuum Pumps	
T2476	93117	Rocker Switch 93117	

Swage Adapters			
Realcold Stock No.	Model	Description	Price \$ Excl. GST
T2580	60444	Swage Adapter 3/16" - 3/8"	
T2581	60439	Swage Adapter 1/4"	
T2583	60446	Swage Adapter 1/2"	
T2585	60448	Swage Adapter 3/4"	

Note: Except for the cartridges, all other spares are inter-changeable.

Tube Cutter Spares - Yellow Jacket®

Realcold Stock No.	Model	Description	Price \$ Excl. GST
T2502	60100	Cutter Wheel for 60101, 60102, 60103	
T2504	60124	Cutter Wheel for 60139	
T2506	60147	Cutter Wheel for 60146	
T2516	60127	Wheel Screw for 60123 (New)	
T2517	60172	Handle Screw for 60139	
T2526	60079	Wheel Pin & Clip for 60101, 60102, 60103	
T2528	60144	Wheel Pin & Clip for 60142	
T2531	60140	Screw/Retainer for 60139	
T2538	60095	Reamer Screw & Washer for 60101, 60102, 60103	

Bernzomatic Self-Igniting Brazing Torches

Realcold Stock No.	Description	Price \$ Excl. GST
N6006	BERNZOMATIC Self-Igniting Brazing Torch A simple press of the piezo igniter gives instant flame for brazing. The high performance pressure regulator and swirl flame allows higher temperatures than conventional torches. Superior performance in cold weather.	
N6010	Brazing Turbo Set 200 Excl. Gas CB66 Brazing Torch Description: A light weight welding and brazing system with disposable gas cylinder's. Each kit contains: <ul style="list-style-type: none"> • Metal Storage carrier • Oxygen pressure reducers with HP gauge and flash back arrestors • Mapp Pro pressure reducer with LP gauge and flash back arrestors • 2 m hoses with connections • Hand piece with 160 I nozzle • 4 additional nozzles 63 – 100 – 250 – 315 I • Protective goggles • Multi-purpose spanner • Flint lighter • 2 x Welding Rod 	
N6050	Gas Canister (Disposable)	
N6011	1L Oxygen Cylinder	



N6010 Brazing Turbo Set 200



Some helpful hints on using your Bernzomatic:


- NOTE - USE only IN WELL VENTILATED AREAS
 - DO NOT ADJUST THE FLAME SO LOW THAT THE STEEL BURNER TIP BECOMES RED HOT OR DAMAGE TO THE TIP MAY RESULT.
- Q. Why does my torch head break at the air holes?
A. In order to ensure that the cylinder does not break or explode if the torch is accidentally dropped or abused, BernzOmatic torches are designed to break safely at the air holes.
- Q. Why will my torch not stay lit when tipped upside down?
A. When a non regulated brass torch is tipped upside down, the liquid propane in the torch works its way through the torch and blows out the flame.
- Q. Why in cold weather do I only get a small flame out of my torch?
A. The size of the torch flame varies with the pressure in the gas cylinder. When it is very cold there is only a small amount of gas pressure in the cylinder.
- Q. Why is my torch hard to light?
A. Most torches light better when the valve is just cracked open, and there is a small gas flow.





Brazing Alloy (Silver)

Realcold Stock No.	Type	Tip Colour	Diameter x Length (mm)	Sold Per	Price \$ Excl. GST
N0525	5% SBA	Silver	2.5 x 750	Per Kilo	
N0525A	5% SBA	Silver	2.5 x 750	Per Stick	
N1515	15% SBA	Tan	1.5 x 750	Per Kilo	
N1515A	15% SBA	Tan	1.5 x 750	Per Stick	
N1525	15% SBA	Tan	2.5 x 750	Per Kilo	
N1525A	15% SBA	Tan	2.5 x 750	Per Stick	
N1530	15% SBA	Tan	3.0 x 750	Per Kilo	
N1530A	15% SBA	Tan	3.0 x 750	Per Stick	
N3415	34% SBA	Green	1.5 x 750	Per Kilo	
N3415A	34% SBA	Green	1.5 x 750	Per Stick	
N5515	55% SBA	Dark Green	1.5 x 750	Per Kilo	
N5515A	55% SBA	Dark Green	1.5 x 750	Per Stick	
N5530	55% SBA	Dark Green	3.0 x 750	Per Kilo	
N5530A	55% SBA	Dark Green	3.0 x 750	Per Stick	
N5020	General Purpose Flux for Silver Brazing Alloy			250gm Pot	

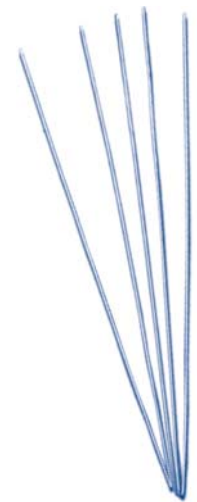

- 5% Silver (Silver Tip)**
 Suitable for copper to copper and copper alloys. No flux required for copper to copper. Use flux for copper alloys. Cadmium free.
- 15% Silver (Tan Tip)**
 Suitable for copper to copper and copper alloys, giving excellent ductility for high stressed joints. No flux required for copper to copper. Use flux for copper alloys. Cadmium free.
- 34% Silver (Green)**
 GP alloy for general engineering metals giving excellent fluidity with excellent gap filling qualities. Flux should be used. Cadmium free.
- 55% Silver (Dark Green Tip)**
 Excellent alloy, giving high strength with excellent capillary action. Good ability to fill fine gaps. Cadmium free.
- Realcold recommend the use of General Purpose Flux, N5020, when brazing non-ferrous metals.

Brazing Accessories

Realcold Stock No.	Description	Sold Per	Price \$ Excl. GST
T0119	La-Co Heat Seal Stick	each	
N5022	La-Co Aluminium Repair Kit Complete with flux paste, (for easy soldering of aluminium to copper).	Kit	
N0003	MA-Line Sand Cloth 1.1/2"	9 metre	
N0005	MA-Line Sand Cloth 1.1/2"	22 metre	
N0007	MA-Line Mesh Cloth 1.1/2"	45 metre	
N0009	MA-Line Open Mesh Cloth 1.1/2"	9 metre	
N0010	Emery Tape 80 grit	50 metre Roll	
N0015	Emery Tape 180 grit	50 metre Roll	



Tools & Test Equipment